




CITEL

Compact 1-phase Type 2 (or 3) surge protector - 230 V - Pluggable

DAC40CS-20-275



- ↳ Compact Surge protector, 2-pole Type 2 or 3
- ↳ Conductivity per pole: $I_n = 20 \text{ kA}$; $I_{max} = 40 \text{ kA}$
- ↳ Common protection mode
- ↳ Safe disconnect device
- ↳ Transverse / longitudinal voltage protection
- ↳ Energetically coordinated
- ↳ Pluggable protection module
- ↳ Remote signalling
- ↳ IEC 61643-11 / EN 61643-11 certified
- ↳ UL1449 ed.5 compliance

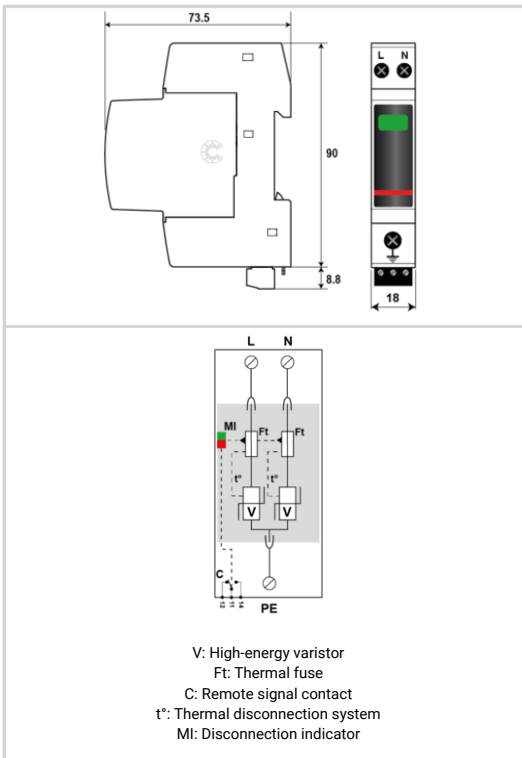

Electrical Characteristics		
SPD type		2
Network		230 V single-phase
AC system		TN
Max. AC operating voltage	U_c	275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Residual Current Leakage current to Ground	I_{pe}	< 1 mA
Follow current	I_f	None
Nominal discharge current 15 x 8/20 μ s impulses	I_n	20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I_{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I_{max} Total	80 kA
Protection mode(s)		L/PE and N/PE
Protection level N/PE @ In (8/20 μ s)	U_p N/PE	1.25 kV
Protection level L/PE @ In (8/20 μ s)	U_p L/PE	1.25 kV
Admissible short-circuit current	I_{sc}	10 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		Single phase
Connection to Network		By screw terminals: L/N = 1.5-10mm ² (16mm ² rigid) or PE = 2.5-25mm ² (35mm ² rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T_u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator - Red/Green
Spare module(s)		MDAC40C-20-275
Remote signaling of disconnection		Output on changeover contact
Wiring for remote signaling		1.5 mm ² max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 1TE (EN43880)
Disconnectors		
Thermal disconnecter		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		KEMA
Part number		
821510221		

