





Type 1+2 PV Surge Protector for PCB mounting

CITEL

PPV1-13GS-1200

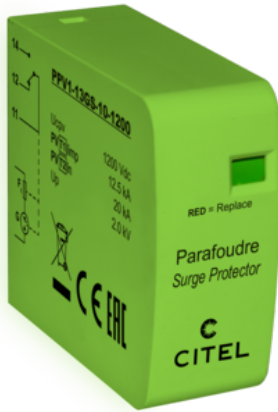

- Type 1+2 surge protector for Photovoltaic
- PCB mounting
- $I_{imp} : 12.5 \text{ kA} (10/350 \mu\text{s})$
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance*

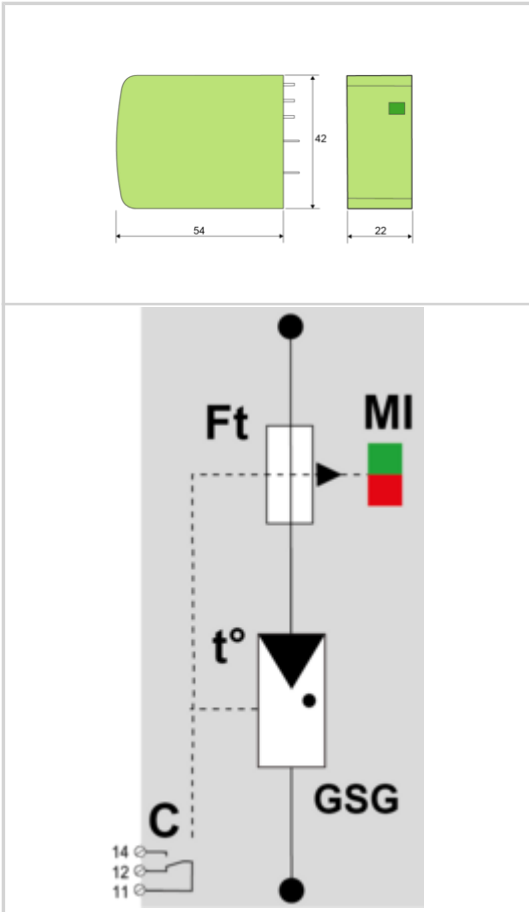

Electrical Characteristics		
SPD type		1+2
Max. PV operating voltage	Ucpv	1200 Vdc
PV Permanent Operating current <i>Current consumption at Ucpv</i>	Icpv	< 0.1 mA
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	20 kA
Impulse current by pole <i>max. withstand 10/350μs by pole</i>	Iimp	12.5 kA
Current withstand short circuit PV	Iscpv	15 000 A
Protection level <i>@ In (8/20μs)</i>	Up	2 kV
Protection level (star mounting) <i>(+/-) / (+/PE or -/PE) @ In (8/20μs)</i>	Up	4 kV
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Through soldering pins
Mounting		On Printed Circuit Board
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		Mechanical indicator
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.033 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Without
Standards		
Standards compliance		IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
Part number		
8724608		

