




Type 1+2 AC surge protector - 1-pole

CITEL

DS250VG-690



- Type 1+2 surge protector
- For 400/690 V network
- In: 30 kA
- Iimp: 25 kA
- Low voltage Up
- Internal disconnection, status indicator
- Remote signaling
- UL1449 ed.5 compliance
- IEC 61643-11, EN 61643-11 certified

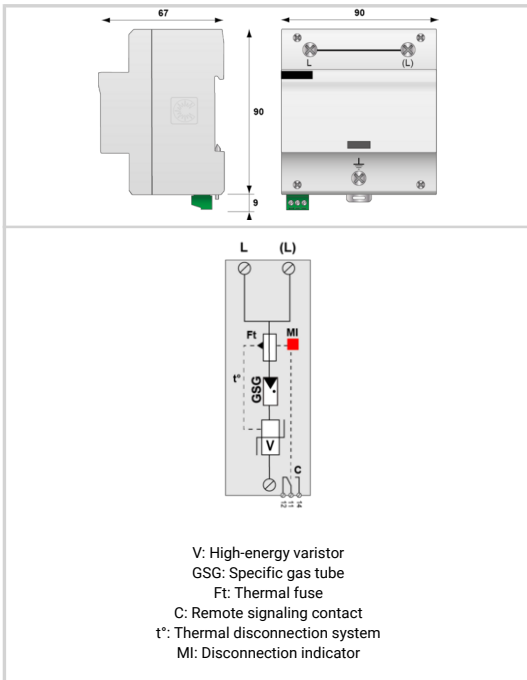

Electrical Characteristics		
SPD type		1+2
Network		400/690 V
Nominal line voltage	Un	690 Vac
Max. AC operating voltage	Uc	760 Vac
Max. load current if series connection	IL	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	1050 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	1350 Vac withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	30 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	100 kA
Impulse current by pole max. withstand 10/350 μs by pole	I _{imp}	25 kA
Withstand on overvoltages IEEE C62.41.1		20 kV
Specific energy by pole max. withstand 10/350 μs	W/R	156 kJ/ohm
Connection mode(s)		L/N or L/PE
Protection mode(s)		Common Mode or Differential Mode
Protection level L/PE @ In (8/20 μs)	Up L/PE	4 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20 μs)	Up-5kA	2.6 kV
Admissible short-circuit current	I _{sc}	50 000 A
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
SPD configuration		Single phase
Connection to Network		By screw: 6-35mm ² (50mm ² flexible)
Format		1-pole modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.68 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 315 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		TUV
Part number		
63162		

